

Technical Data Sheet

Gel-free
ezKore Loose Tube Optical Cables

Standard buffer tube with 2-288f

Dual Jacket / Dual Armor

Application

Rugged outdoor fiber optic cable designed for direct burial installations, where extreme compressive strengths and rodent protection is required.

Benefits

- Fiber Count up to 288f
- Enhanced compressive strength
- Superior rodent protection
- Suitable for aerial, duct and direct buried applications
- MDPE jacket for low friction installation
- Corrugated steel armor for added mechanical protection
- Gel-free buffer tubes & core
- The dry water blocking materials can easily be removed without the use of cable cleaning solvents, yielding significant labor cost savings
- Excellent handling characteristics

Fiber types

- G.651 multi-mode fiber
- G.652D single-mode fiber
- G.655 NZDS fiber for DWDM applications

Full range of protections

- Water blocked
- Rodent resistant


Full range of applications

- Aerial
- Duct
- Direct buried

Optional protections

- HDPE jacket
- All dielectric
- Single jacket / single armor
- Dual jacket / single armor
- Triple jacket / dual armor

Cable cut-away

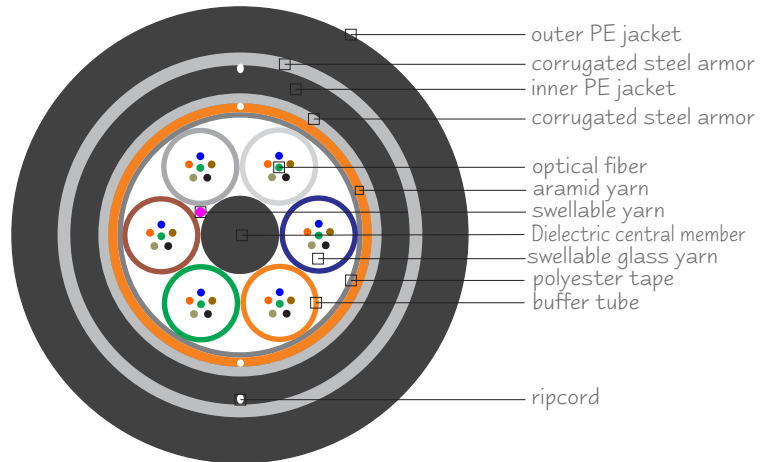

Typical parameters

Number of fibers	Up to 288
Diameter	17.0 mm (0.67 in) to 27.0 mm (1.06 in)
Cable weight	299 kg/km (201 lbs/kft) to 622 kg/km (445 lbs/kft)
Max. bend radius	20 x cable O.D.
Max. working tension	2700 N (600 lbf)
Operating temperature range	-40 °C / 70 °C (-40 °F / 158 °F)

Above figures are nominal values; actual production dimensions and weights may deviate slightly from the indicated figures above



Qualifications & approvals

REA PE-90
Bellcore Standards
ITU Standards
TIA/EIA Standards

www.4SProducts.com

1st ISSUE 2019

4621 Ponce de Leon Boulevard
Coral Gables, FL 33146, USA
[1] 305.666.7474
[1] 305.666.7272 fax
cable@4SProducts.com e-mail

Technical Data Sheet

Gel-free
ezKore Loose Tube Optical Cables

Standard buffer tube with 2-288f
Dual Jacket / Dual Armor

Cable Properties	Diameter	Weight
002 - 036f	17.0 mm (0.67 in)	299 kg/km (201 lbs/kft)
037 - 060f	17.0 mm (0.67 in)	299 kg/km (201 lbs/kft)
061 - 072f	17.7 mm (0.70 in)	320 kg/km (215 lbs/kft)
073 - 096f	19.5 mm (0.77 in)	384 kg/km (258 lbs/kft)
097 - 120f	21.9 mm (0.86 in)	474 kg/km (318 lbs/kft)
121 - 192f	23.0 mm (0.91 in)	494 kg/km (332 lbs/kft)
193 - 216f	23.8 mm (0.94 in)	526 kg/km (353 lbs/kft)
217 - 240f	24.8 mm (0.97 in)	565 kg/km (380 lbs/kft)
241 - 288f	27.0 mm (1.06 in)	662 kg/km (445 lbs/kft)

Mechanical Performance	Test Procedure	Specification
Low & high temperature cable	EIA/TIA-455-37A FOTP-37	20 x cable O.D. @ -30 °C and 60 °C
Impact resistance	EIA/TIA-455-25A FOTP-25	25 impact cycles
Compressive strength	EIA/TIA-455-41A FOTP-41	>440 N/cm (248 lbs/in.)
Cable twist	EIA/TIA-455-85 FOTP-85	2 meter length ± 180°
Cable cyclic flexing	EIA/TIA-455-104 FOTP-104	20 x cable O.D. 25 cycles
Max. bend radius	EIA/TIA-455-37A FOTP-37	Installation Service 20 x cable O.D. 10 x cable O.D.
Max. tensile load	EIA/TIA-455-33 FOTP-33	Installation Service 2700 N (600 lbf) 890 N (200 lbf)
Gopher resistance		index rating <3

Environmental Performance	Test Procedure	Specification
Temperature	EIA/TIA-455-3A FOTP-3	Operation -40 to +70 °C (-40 to +158 °F) Installation -30 to +60 °C (-22 to +140 °F) Storage/Shipping -40 to +75 °C (-40 to +168 °F)
Cable aging	EIA/TIA-455-37 FOTP-37	168 hours @ 85 °C
Cable Freezing	EIA/TIA-455-98 FOTP-98	Frozen in ice
Water penetration	EIA/TIA-455-82B FOTP-82	1 meter for 24 hours
Compound drip temperature	EIA/TIA-455-81B FOTP-81	75 °C
Color coding permanence	Telcordia GR-20	Colors stable after aging



Specifications are subject to change without notice. The data given is subject to normal manufacturing tolerances. 4SProducts Loose Tube Optical Cables are tested in accordance with the requirements of Bellcore GR-20. Performance specifications are measured per EIA Fiber Optic Test Procedures.

